




Anslutningar:




SX är lagerförd. Önskas möjlighet att ansluta i toppen ber vi er kontakta Epecon.

Tillgängliga storlekar:

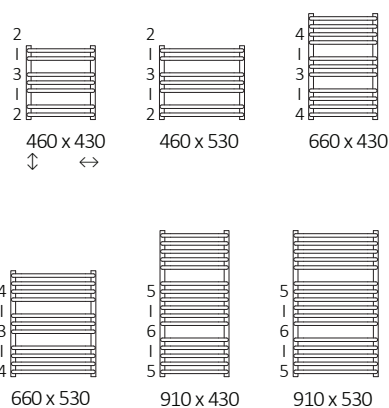

- Leveransvillkor: AA VVS 2009
- Skyddsemballerad i plast och tre lager wellpapp.

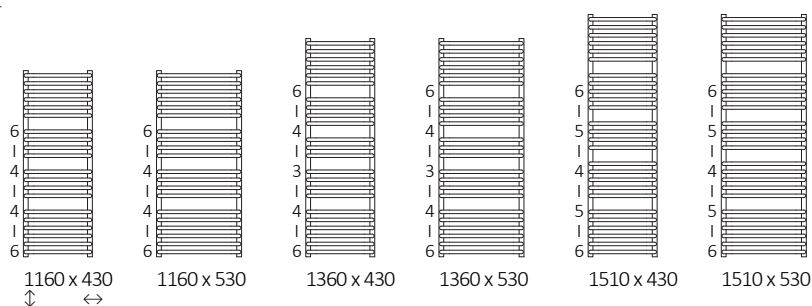


A [mm]	B [mm]	C [mm]		75/65/20°C [W]*	90/70/20°C [W]*		D [mm]	E [mm]	F [mm]		
						[W]				[kg]	[dm³]
460	430	400	9016	198	248	200	400	275	94	4,2	1,60
460	530	500	9016	244	305	300	500	275	94	4,8	1,80
660	430	400	9016	282	352	300	400	475	94	6,1	2,43
660	530	500	9016	348	434	400	500	475	94	7,0	2,74
910	430	400	9016	387	483	400	400	725	94	8,5	3,46
910	530	500	9016	477	596	400	500	725	94	9,8	3,91
1160	430	400	9016	470	588	400	400	975	94	10,7	4,36
1160	530	500	9016	580	725	600	500	975	94	12,3	4,92
1360	430	400	9016	533	667	600	400	1175	94	12,3	5,05
1360	530	500	9016	657	822	600	500	1175	94	14,2	5,70
1510	430	400	9016	596	745	600	400	1325	94	13,8	5,67
1510	530	500	9016	735	918	800	500	1325	94	15,8	6,40

\* Teoretiska data

# Rhea

SX (standardanslutning)

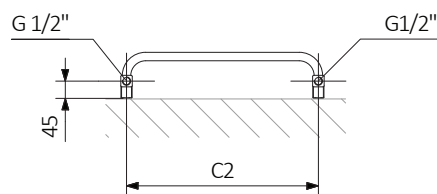

GD (ej lagerförd)

